
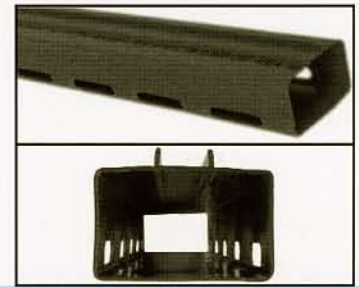




**We Think It Is Important That Consumers Are Fully Educated On The Available Basement Waterproofing Systems.**

**Product Comparisons**



**PVC Pipe / Corrugated Pipe & Stone System**





**Pre-set Depth System #1**

**Pre-set Depth System #2**

**Patented Water Trek Aqua Route® System**

<p>1. Pipe can be purchased in any store.</p>	<p>Conduit supplied by manufacturer.</p>	<p>Conduit supplied by manufacturer. No proven track record - limited history on proven performance.</p>	<p>Conduit supplied by manufacturer.</p>
<p>2. Anyone can install, non-specialized.</p>	<p>Only manufacturer's representatives can install – specialized.</p>	<p>Anyone can install, but specialized.</p>	<p>Only manufacturer's representatives can install – specialized.</p>
<p>3. System installed to 12" depth under floor.</p>	<p>System installed only 4" under floor.</p>	<p>Manufacturer unclear how to install - all trial and error - possible failure</p>	<p>System installed as needed. Depth will be custom tailored – not predetermined.</p>
<p>4. Visible gap may be left after concrete installed.</p>	<p>Has 3/8" gap on wall, may catch water from wall.</p>	<p>Manufacturer does not specify how to handle - big question dependent on installer.</p>	<p>Has 1/16" - 1/4" gap on wall – designed to catch water from wall.</p>
<p>5. Limited Warranty.</p>	<p>Warranty available.</p>	<p>Limited Warranty.</p>	<p>Warranty available.</p>
<p>6. Circular holes / small slotted holes on pipe.</p>	<p>Circular holes in back only.</p>	<p>Double chamber does not allow for self cleaning - system holes tend to clog. Does not handle proper water volume. Allows stone into system.</p>	<p>Specialized holes in front and back.</p>
<p>7. Can be used for interior arteries and floor cracks.</p>	<p>Cannot be used for interior arteries.</p>	<p>Can be used for interior arteries - but tends to clog. Does not wash.</p>	<p>Can be used for interior arteries and floor cracks.</p>

# Available Basement Waterproofing Systems Product Comparisons

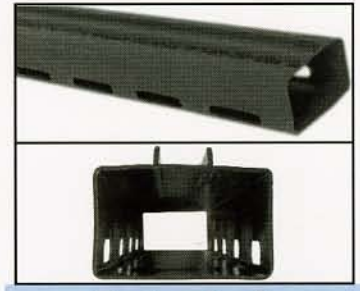

## PVC Pipe/ Corrugated Pipe & Stone System

## Pre-set Depth System #1

## Pre-set Depth System #2

## Patented Water Trek Aqua Route® System

8. Pipe purchased in stores; non-specialized contractors can install; service problems may affect warranty.	Specialized company installs, honoring warranty.	Conduit can be purchased by any contractor. No proven track record - brand new experimental product.	Specialized company installs, honoring warranty.
9. Pipe easily clogs with dirt and mud caused by significant depth.	System designed to be installed on footing only. If installed on dirt, may clog.	Pipe easily clogs due to chambers. Does not self wash.	System can be installed on footing or in front, will not clog due to <b>holes in front and back</b> ; self-washing.
10. Significant depth could activate pump unnecessarily.	Addresses water threatening floor but not in front of footing due to holes on inside only.	Addresses water from footing and in front - but clogs easily..	Addresses water threatening floor surface only. Pumps will last longer.
11. Depth of installation may cause structural problems.	No structural threat.	Unknown depth. Untested new product.	No structural threat.
12. Job is very messy; Extreme trauma to homeowner and basement.	Job is cleaner, less stressful, less time-consuming.	Tends to take longer due to "snap together" inferior construction of product.	Job is cleaner, less stressful, less time-consuming.
13. Sump location may vary.	Sump location limited to lowest spot.	Sump location limited to lowest spot.	Sump location <b>customized</b> to individual application.
14. No ridge on top – cannot attach to concrete.	No ridge on top – cannot attach to concrete.	No ridge on top – cannot attach to concrete.	<b>Ridge on top</b> will attach firmly to concrete.
15. Flange on top can vary.	Flange on top has 3/8" gap.	Variable flange - no consistency.	Flange on top <b>fits tight to wall</b> but allows water from wall cracks or windows to enter system. <b>Prevents odors.</b>
16. Holes on front and back or all around pipe, excessive depth may allow easy clogging.	Holes on backside only, does not self-wash, does not address water in front of footing.	Open conduit cannot self-wash. Conduit only handles 1/2 volume - tends to clog.	Holes on front and back, <b>self-washes, does</b> address water in front of footing as well as footing/wall joint.

**To Protect Your Most Valuable Possession .... The Choice Is Easy**